


Spectrum Test Report

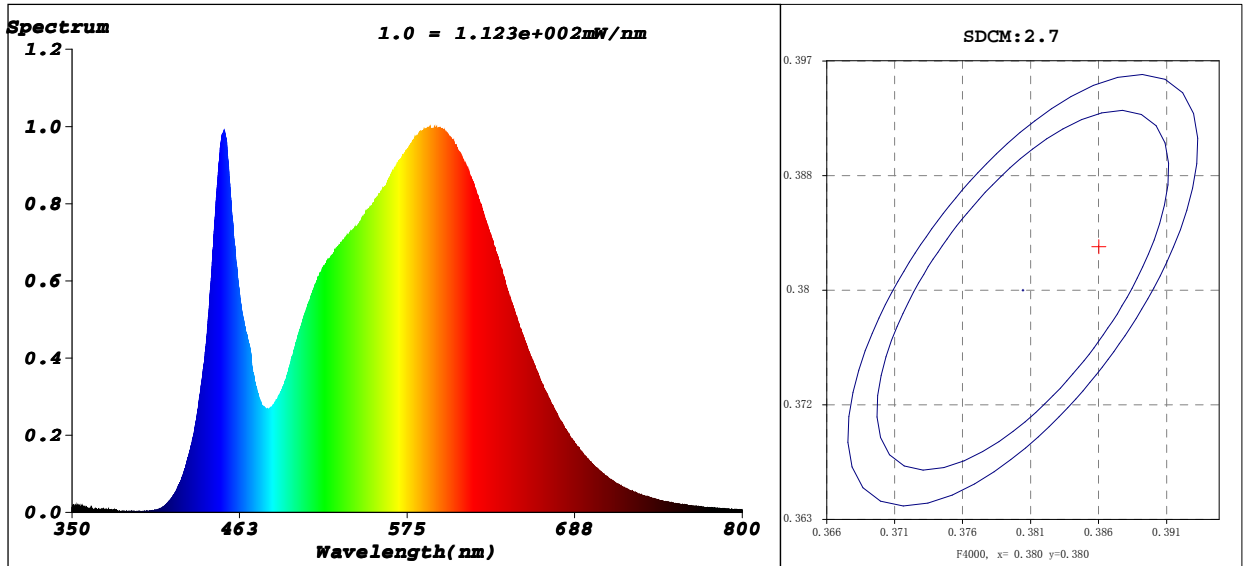

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3856$ $y=0.3832/u'=0.2259$ $v'=0.5052$

CCT=3911K(Duv=0.0015) Dominant WL:Ld =578.6nm Purity=30.7%

Peak WL:Lp=593.4nm FWHM=144.1nm

Render Index:Ra=81.3 Render Index:AvgR =74.0

R1 =79 R2 =88 R3 =95 R4 =80 R5 =79 R6 =83 R7 =85

R8 =61 R9 =0 R10=71 R11=78 R12=60 R13=81 R14=97 R15=72

Photometric & Radiometric Parameters

Flux=6364 lm Eff.:106.47 lm/W Fe=19.06 W

Electrical parameters

V=230.1 V I=0.4525 A P=59.77 W PF=0.5741 Kdisp(IEC) = 0 F=49.99 Hz

功率因数 Kdisp(IEC)=0 频率=49.99 Hz

LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 51 ms Ip = 55385 (85%)

Model:LLPBL60X60CM60W4000K-1 Test Mode: Accuracy Test; Sensitivity = High; Temp: ON
 Test By:DAMIN Number:LLPBL60X60CM60W4000K-1
 Temperature:25.3Deg Date:2023-07-25 16:39:09
 Manufacturer: Humidity:65.0%
 Assessor:damin Remarks:---