


## Spectrum Test Report

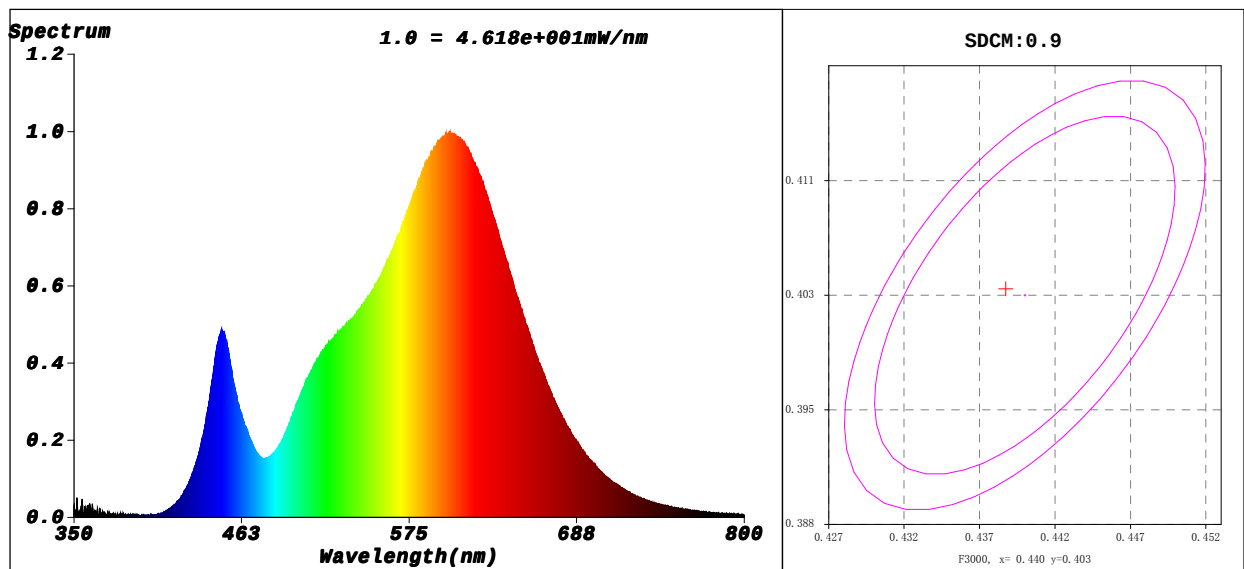

### Colorimetric Parameters

Chromaticity Coordinate:  $x=0.4387$   $y=0.4034$   $u'=0.2520$   $v'=0.5214$

CCT=2965K(Duv=-0.0005) Dominant WL:Ld =583.2nm Purity=52.8%

Peak WL:Lp=602.4nm FWHM=121.6nm

Render Index:Ra=81.2 Render Index:AvgR =75.2

R1 =79 R2 =90 R3 =96 R4 =80 R5 =80 R6 =88 R7 =82

R8 =56 R9 =0 R10=77 R11=79 R12=72 R13=82 R14=99 R15=71

### Photometric & Radiometric Parameters

Flux=2200 lm Eff.:106.46 lm/W Fe=6.624 W

Fmol(umol/s):31.947 Fluo. and blue light ratio:8.471 Fluorescent eff.:153.9

### Electrical parameters

V=230.1 V I=0.1673 A P=20.67 W PF=0.5368 Kdisp(IEC) = 0 F=49.99 Hz

功率因数 Kdisp(IEC)=0 频率=49.99 Hz

LEVEL:OUT

WHITE:ANSI\_3000K

Status: Integral T=10.76 Ip=3467 (5%)

Model:LLR26WMOZSMBW3000K-P-3 H07 Number:61

Test By:Test Mode: Fast Test; Sensitivity:20dB; Recal:10:07

Temperature:25.3Deg

Humidity:65.0%

Manufacturer:

Remarks:

Assessor:damin