


Light Source Test Report

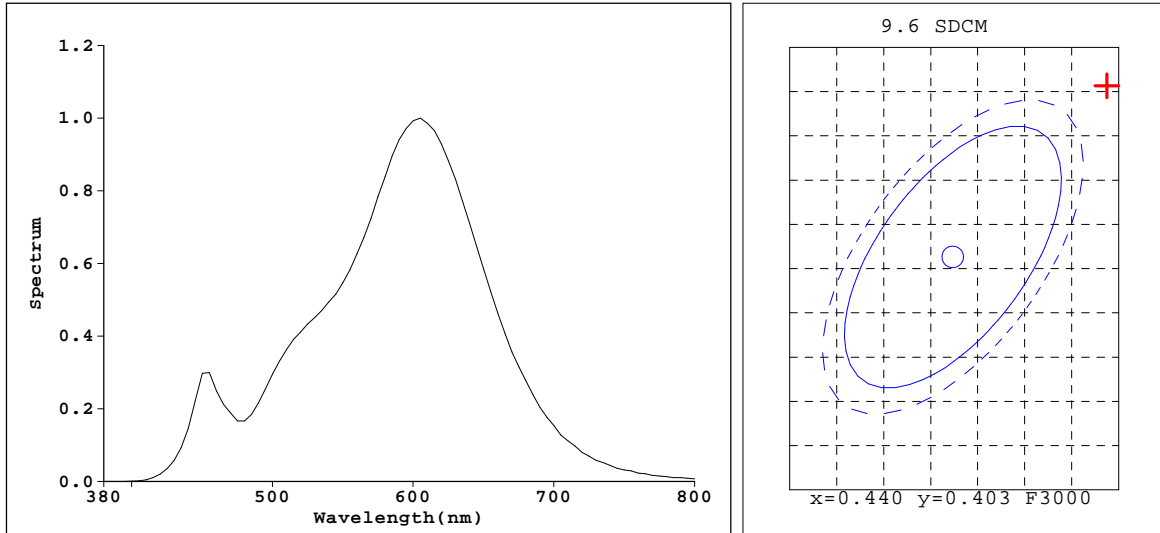

Color Parameters:

Chromaticity Coordinate: x=0.4590(dx=0.0030) y=0.4185(dy=0.0065)
 Chromaticity Coordinate: u'=0.2584 v'=0.5302(duv=2.97e-03)
 Tc=2773K Dominant WL:Ld=582.9nm Purity=63.4% Centroid WL:594.0nm
 Ratio:R=26.1% G=71.9% B=2.0% Peak WL:Lp=605.0nm HWL:115.5nm
 Render Index:Ra=81.5
 R1 =79 R2 =91 R3 =96 R4 =80 R5 =80 R6 =90 R7 =82
 R8 =55 R9 =1 R10=80 R11=79 R12=73 R13=82 R14=98 R15=70

Photo Parameters:

Flux: 2009.6 lm Fe: 6.0463 W Efficacy:84.58 lm/W
 WHITE:ANSI_2700K

Electrical Parameters:

Luminaire: U=227.41V I=0.1947A P=23.76W PF=0.5366

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=30310(G=5,D=50)
 REF=6886(R=2) %=-0.059% PMT: 25.5 centigrade [150.0]

Product Type:LLUF024WIP44KORE27WW-4 Manufacturer:
 Number: Test Department:
 Temperature:25.3 deg Humidity:65.0%
 Test Operator: Test Date:2021-04-17 23:09:50
 Software:V3.00.137 Instrument:PMS-80_V1 (SN:G107113CJ6321130)