


Spectrum Test Report

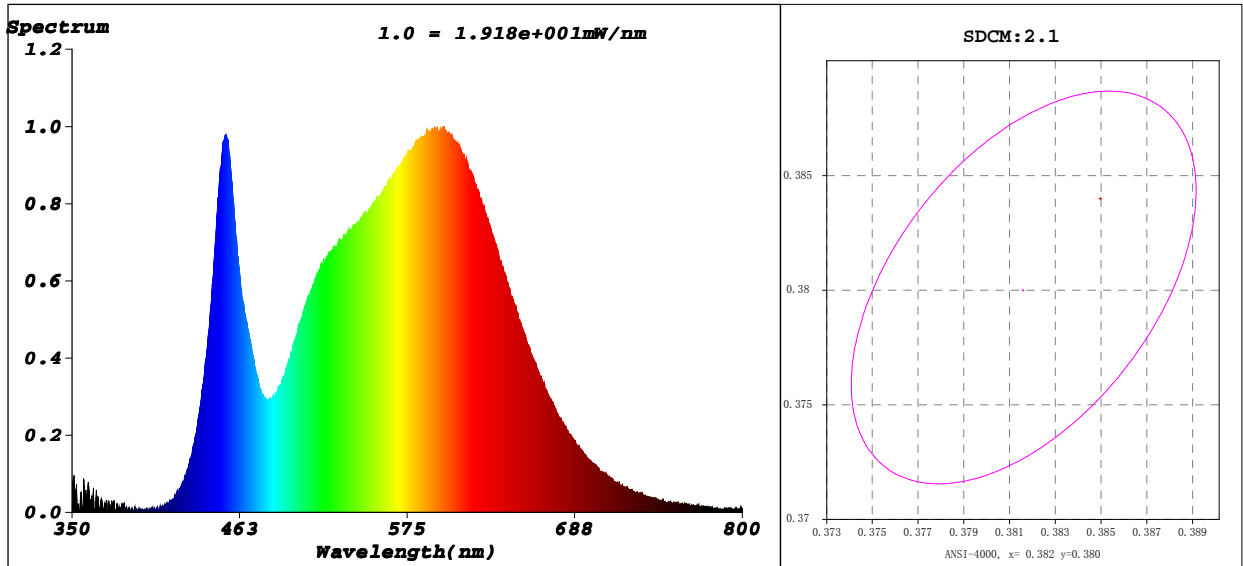

Colorimetric Parameters

Chromaticity Coordinate:  $x=0.3852$   $y=0.3838$   $u'=0.2254$   $v'=0.5054$

CCT=3926K(Duv=0.0019) Dominant WL:Ld =578.4nm Purity=30.8%

Peak WL:Lp=599.7nm FWHM=146.2nm

Render Index:Ra=82.8 Render Index:AvgR =76.0

R1 =81 R2 =89 R3 =95 R4 =81 R5 =81 R6 =85 R7 =86

R8 =64 R9 =7 R10=74 R11=80 R12=61 R13=83 R14=98 R15=74

Photometric & Radiometric Parameters

Flux=1089 lm Eff.:125.62 lm/W Fe=3.287 W

Fmol(umol/s):15.416 Fluo. and blue light ratio:4.886 Fluorescent eff.:169.0

Electrical parameters

V=230.2 V I=0.07016 A P=8.668 W PF=0.5367 Kdisp(IEC) = 0 F=49.99 Hz

功率因数 Kdisp(IEC)=0 频率=49.99 Hz

LEVEL:OUT

WHITE:ANSI\_4000K

Status: Integral T=10 ms In=1551 (2%)  
Model:LLUFO9WIP54BOATSW-4000K-4 HNumber:16

Test By:Test Mode: Fast Test; Sensitivity: 2024-06-20 16:55:19

Temperature:25.3Deg

Humidity:65.0%

Manufacturer:

Remarks:

Assessor:damin