


Spectrum Test Report

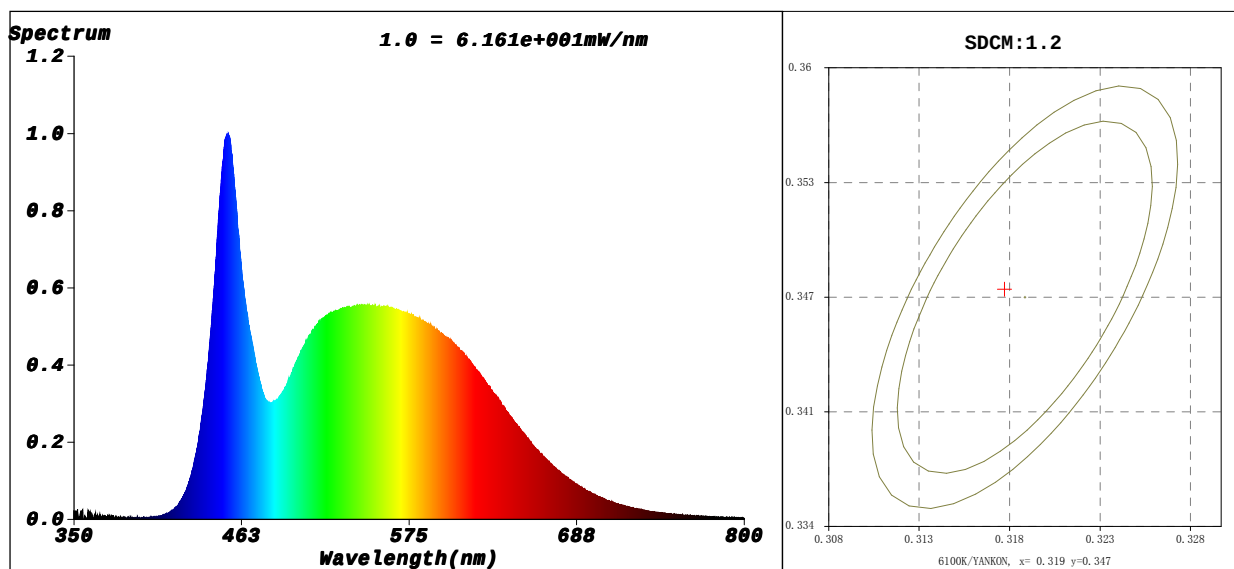

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3179$ $y=0.3474$ $u'=0.1946$ $v'=0.4786$

CCT=6141K(Duv=0.0099) Dominant WL:Ld =504.1nm Purity=4.7%

Peak WL:Lp=453.5nm FWHM=25.4nm

Render Index:Ra=83.2 Render Index:AvgR =75.6

R1 =80 R2 =88 R3 =94 R4 =81 R5 =81 R6 =84 R7 =89

R8 =69 R9 =6 R10=72 R11=80 R12=58 R13=82 R14=97 R15=74

Photometric & Radiometric Parameters

Flux=2223 lm Eff.:110.01 lm/W Fe=7.072 W

Fmol(umol/s):31.999 Fluo. and blue light ratio:2.875 Fluorescent eff.:139.1

Electrical parameters

V=230.1 V I=0.1640 A P=20.20 W PF=0.5354 Kdisp(IEC) = 0 F=49.99 Hz

功率因数 Kdisp(IEC)=0 频率=49.99 Hz

LEVEL:OUT

WHITE:OUT

Status: Integral T=10.06 T_p=3459 (5%)

Model:LLR26WMOZSMBW6000K-P-3 H01 Number:58

Test By:Test Mode: Fast Test; Sensitivity:20dB; Recal:11/07/17

Temperature:25.3Deg

Humidity:65.0%

Manufacturer:

Remarks:

Assessor:damin