


Spectrum Test Report

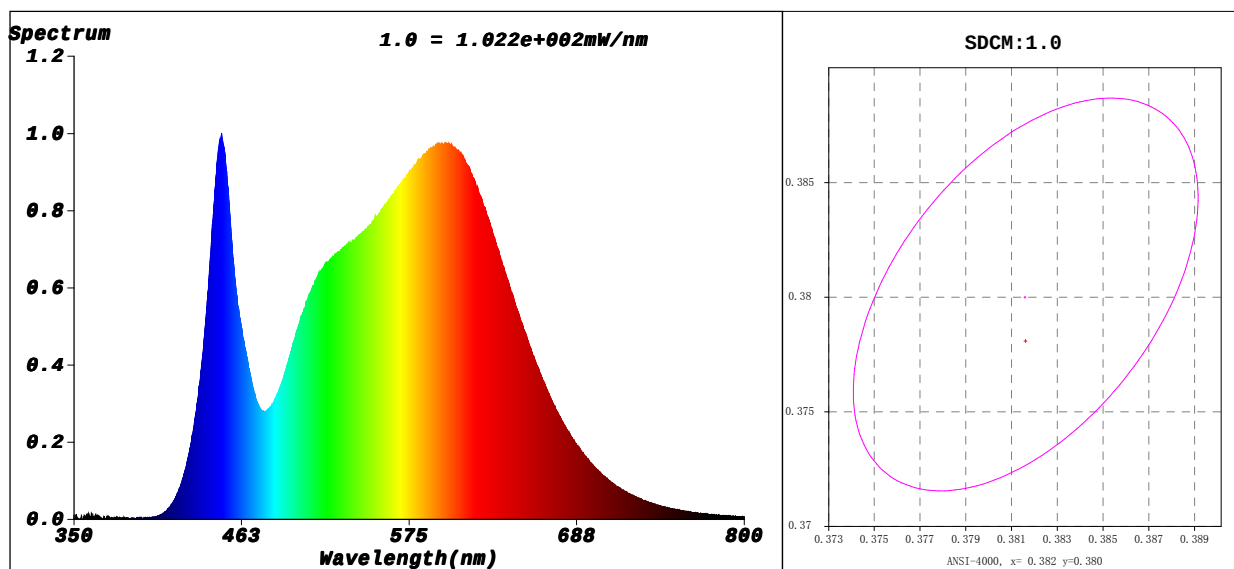

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3818$ $y=0.3779$ $u'=0.2256$ $v'=0.5023$

CCT=3971K(Duv=0.0001) Dominant WL:Ld =579.1nm Purity=28.0%

Peak WL:Lp=449.0nm FWHM=24.1nm

Render Index:Ra=84.7 Render Index:AvgR =78.7

R1 =83 R2 =90 R3 =95 R4 =85 R5 =84 R6 =86 R7 =87

R8 =67 R9 =15 R10=76 R11=85 R12=68 R13=85 R14=97 R15=77

Photometric & Radiometric Parameters

Flux=5745 lm Eff.:95.17 lm/W Fe=17.67 W

Fmol(umol/s):82.947 Fluo. and blue light ratio:4.939 Fluorescent eff.:237.0

Electrical parameters

V=230.2 V I=0.2694 A P=60.37 W PF=0.9735 Kdisp(IEC) = 0 F=49.97 Hz

功率因数 Kdisp(IEC)=0 频率=49.97 Hz

LEVEL:OUT

WHITE:ANSI_4000K

Status: Integral T=10.15 T8=8911 (12%) Model:LV12150CM60W78MMIP65SWTOL Number:30LD

Test By:Test Mode: Fast Test; Sensitivity:20dB Date:2024-06-20 17:21:08

Temperature:25.3Deg

Humidity:65.0%

Manufacturer:

Remarks:

Assessor:damian